


HEAVY-DUTY DUMBWAITER EQUIPMENT ILLUSTRATION

*HomeFlyer*TM
LEVRE HDTM

HEAVY DUTY
DUMBWAITER

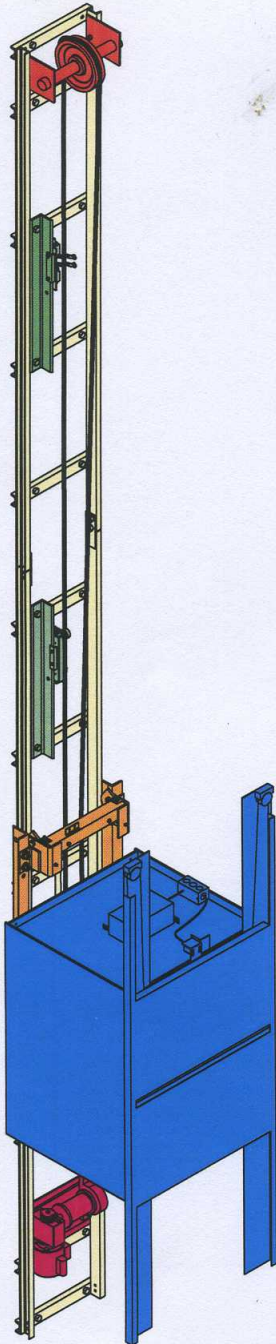

CAPACITY - 200 LB., 300 LB. or 500 LB.

TRAVEL - up to 50 ft.

STOPS - up to 6 stops.

SPEED - 50 feet per minute

OVERHEAD - 1'6" minimum, 2' recommended above top of car (additional overhead required for car gates or overhead machine configurations).

LOADING HEIGHT - 36" minimum when machine is "rail mounted" below car (overhead or remote machine location and/or pit, required for loading heights below 36").

GUIDE RAILS - heavy gauge steel channel.

ELECTRIC SUPPLY - 230 volts, single phase standard. 208/230/460 volts, three phase, available. For 208 volts, single phase, a Buck Boost transformer must be added.

POWERHEAD - single speed winding drum with 1HP or 2 HP motor.

BRAKE - electromagnetic disc brake, electrically released and spring applied.

CONTROLS - momentary contact call/send push buttons at each landing.

SAFETIES - twin instantaneous broken cable, applied by a retained compression spring.

CABLE - 3/16" or 7/32" diameter steel cable.

HOISTWAY DOOR INTERLOCKS - required at each landing.

EMERGENCY LOWERING - manual hand crank.

Paca-Waiter Series 011
As Manufactured for
Integrity Group Cos., Inc. by
Waupaca Elevator Co., Inc.

